

ULTIMATE TMC PRO SERIES

Semi automatic L-sealer and tunnel combination



Ultimate[®] is a registered trademark of PackPark

ULTIMATE TMC PRO SERIES

Semi automatic L-sealer and tunnel combination

ADVANTAGES

- Minimized layout requirement by compact single-chassis design
- Easy to use, compatible with health and safety standards
- Ability to provide heat to wire at exact efficient dose, realized by I-Sealing System®
- Ability to keep wire temperature constant, realized by I-Sealing System®
- Increase in sealing quality, process accuracy and life-span by stabilized heat control

FEATURES

- M Series: Sealing L-Bar is driven by a motor (no need for compressed air)
- M Series: In automatic mode, sealing bar cycles automatically in predefined period
- M Series: In free mode, sealing bar is triggered by button
- M Series: Sensor detects any obstacle and stops the cycle automatically for safety
- H Series: Sealing L-Bar is closed by hand, weight is balanced with reverse load
- H Series: Magnetic holder keeps L-Bar closed for pre-defined time period
- Adjustable speed of tunnel conveyor for optimized heat application period
- Heat adjustment with digital PID control
- Air circulation control by side flap handles
- Automatic post cooling system for cooling down to 70°C before switch off
- Additional emergency temperature control system against fire risk
- Easily transportable on wheels inside a facility

SEALING

- M Series: Sealing is actuated by motor in between wire and silicon rubber
- H Series: Sealing is actuated manually in between wire and silicon rubber
- Sealing wire is positioned on fixed bottom frame for safety
- Sealing wire is embedded into heat-resistant fiber profile
- Teflon belt covered silicon rubber increase sealing quality and life-span of silicon

FLEXIBILITY




- Height of conveyor line can be adjusted with respect to varying product height
- Working time of conveyor can be adjusted with respect to varying product length
- Power of sealing wire can be adjusted with respect to varying film thicknesses
- Heat, time and speed parameters can be easily adjusted via digital control panel
- Various language options are available in digital control panel

OPTIONAL

- Automatic trim winder option is available upon request
- Stainless steel versions are available for wet/moist working environment
- Speed inverter for air circulation fan of heat tunnel
- Tunnel conveyor alternatives: Wire Mesh, Teflon Mesh or Plastic Mesh
- On-site installation and training service options are available

QUALITY

- ISO9001 quality standards with the relevant norm's confirmation
- CE certifications, complies with the latest CE directives
- World-wide approved brands for all mechanical and electrical components
- 1 year warranty against manufacturing faults
- Wearable parts are not included in warranty terms
- 1 set of wear parts is provided along with the machine
- 5 years spare part stock availability is provided
- Installation, testing and training services are provided free of charge

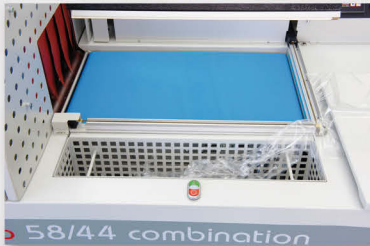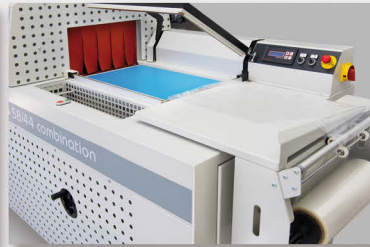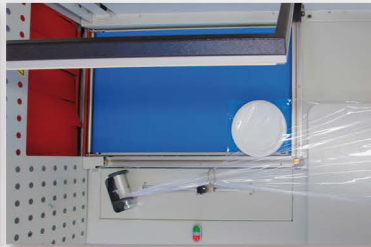

Technical Specifications

Sealer Bar Opening: 250mm (10")
Maximum Capacity: 10 - 12 packs/minute *
Maximum Product Height: 150mm (6")
Maximum Roll Diameter: 250mm (10")
Working Height (D): 960mm (38")
Compr. Air Supply: No
Film Types: POF: 7-37 micron PVC: 15-25 micron
Color: Light gray RAL7035





* For DIN A4 form and TMC Series servo real working speed depends on the product dimensions and the film type.

TMC 58x44-H

Working Principle: Close with hand	Motorized
L - Sealer Sizes: 580 x 440mm (23 x 17")	580 x 440mm (23 x 17")
Maximum Film Width: 550mm (22")	550mm (22")
Installed Power: 400V 13A 3 phase	400V 13A 3 phase
Average Consumption: 7,2 kW / 4,2 kW	7,2 kW / 4,2 kW
Dimensions (AxBxC): 950 x 2800 x 1600mm (37 x 110 x 63")	950 x 2800 x 1600mm (37 x 110 x 63")
Palletized Size (AxBxC): 1150 x 3000 x 1800mm (45 x 118 x 71")	1150 x 3000 x 1800mm (45 x 118 x 71")
Weight (Net / Gross): 420 kg / 490 kg (926 lbs / 1080 lbs)	490 kg / 560 kg (1080 lbs / 1235 lbs)

TMC 58x44-M

Motorized
580 x 440mm (23 x 17")
550mm (22")
400V 13A 3 phase
7,2 kW / 4,2 kW
950 x 2800 x 1600mm (37 x 110 x 63")
1150 x 3000 x 1800mm (45 x 118 x 71")
490 kg / 560 kg (1080 lbs / 1235 lbs)

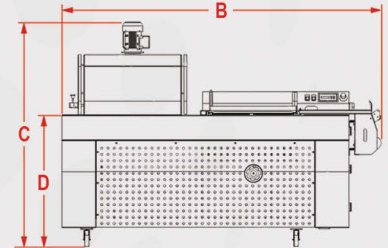

Park Endüstriyel Ürünler Sanayi Uluslararası İç ve Dış Tic. Ltd. Şti.
Atalar Cad. Gamze Sk. No: 13/A 34862
Atalar / Kartal / İstanbul / Türkiye
Tel: +90 216 353 54 66 Mobile / WhatsApp: +90 533 690 05 55
info@packpark.com.tr www.packpark.com.tr